



# SkyBlade

FAN COMPANY

WHERE FORM FOLLOWS FUNCTION

## Yoke “Single Fan Controller”

### KEY FEATURES

- Easily mounted to wall.
- Control each fan individually.
- SkyBlade supplies you with 100 ft. of 6-core cable for installation.
- Operate your fans in either forward (cooling) or reverse (destratification).
- Manually control each fan’s speed.




### TECHNICAL SPECIFICATIONS


<b>Potentiometer</b>	0-10V DC analog   1000 ohm resistance   0.5W power consumption   IP66 protection.
<b>Connections</b>	One (1) 100 ft. of 6-core shielded wire supplied by SkyBlade. One (1) strain relief bushing supplied by SkyBlade.
<b>3-Position Switch</b>	Forward-Off-Reverse capability.
<b>Enclosure</b>	Nema 4X/IP 65 rating   ABS plastic   Dimensions: 5”L x 3”W x 2”H

### WIRING DIAGRAM


230V 1Ph, 230V 3Ph, and 460V 3 PH

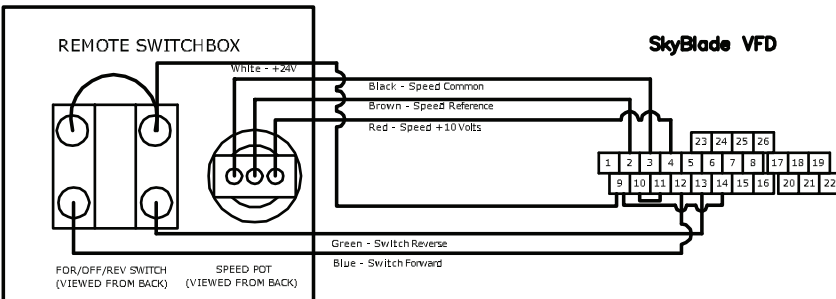


120V 1Ph and 575V 3Ph

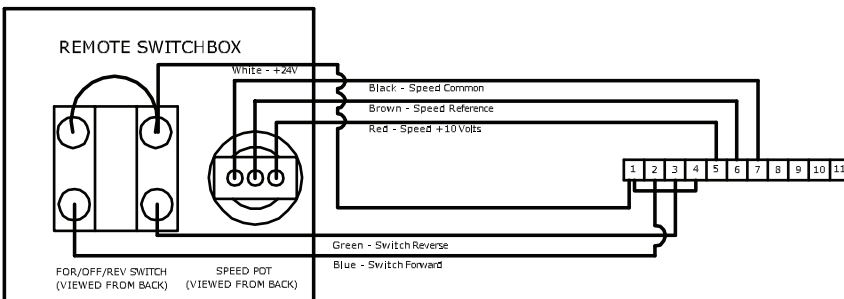


# YOKE PACKAGE CONTENTS




A. Yoke Controller  
(x1)



B. Strain Relief Bushing (x2)



C. Heat-shrink Tubing  
(x1)



D. Control Cable  
(100 ft)

# YOKE ASSEMBLY

