



# SkyBlade

FAN COMPANY

WHERE FORM FOLLOWS FUNCTION

## UltraLite Controller

### KEY FEATURES

- Easily mounted to wall.
- Control each fan individually.
- Operate your fans for cooling and destratification.
- Manually control each fan's forward speed.




### TECHNICAL SPECIFICATIONS


<b>Potentiometer</b>	0-10V DC analog   1000 ohm resistance   0.5W power consumption   IP44-54 protection.
<b>Connections</b>	5-core shielded wire, field supplied.
<b>Enclosure</b>	IP 44(Inset)/IP54 (Surface)   ABS plastic   Dimensions: 3"L x 3.25"W x 3"H

### WIRING DIAGRAM


230V 1/3 PH and 480V 3 PH

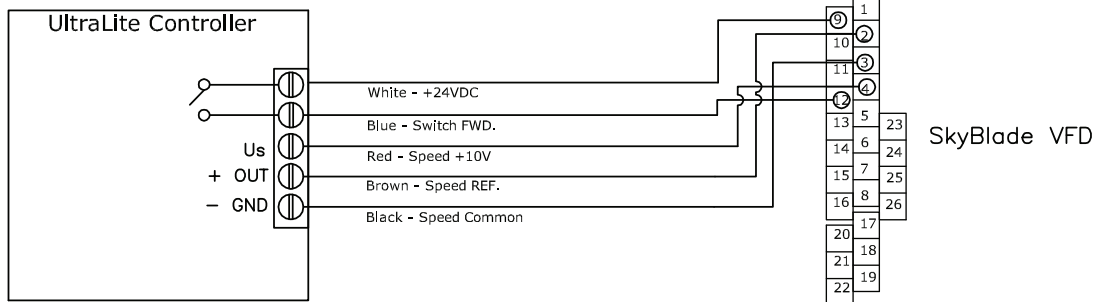


120V 1 PH and 575V 3 PH

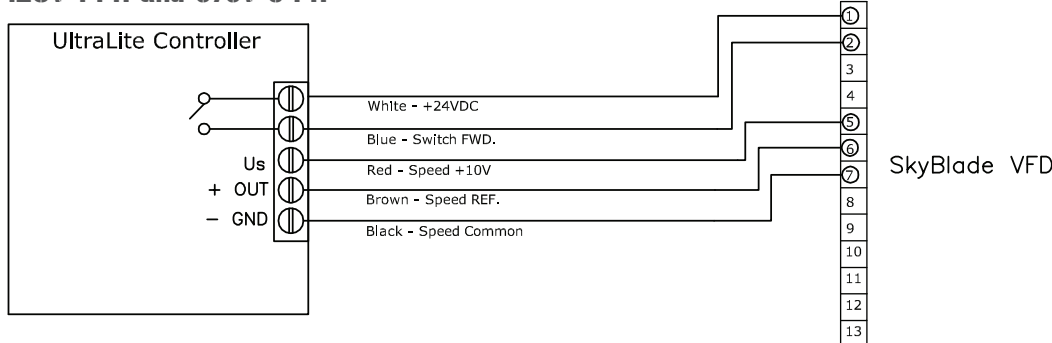

# ULTRALITE PACKAGE CONTENTS

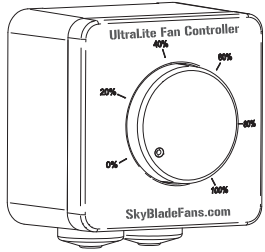

A. UltraLite Controller  
(x1)



B. Plastic Bushing  
(x2)

# ULTRALITE ASSEMBLY

